
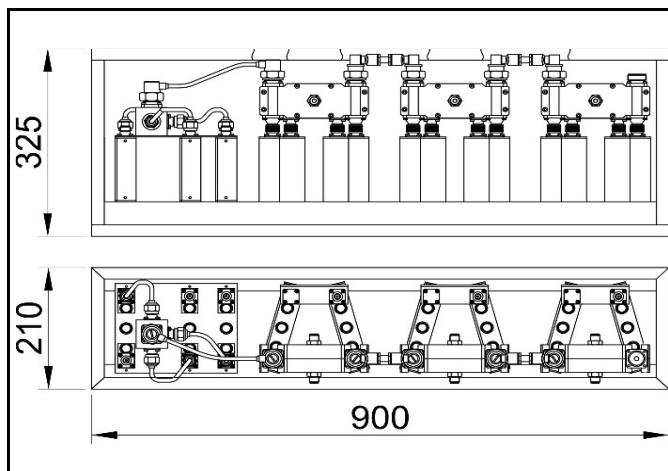


PART NUMBER:

1425-3-S2+3x1425-3-DP1-1610

TITLE:

5 INPUTS UHF COMBINER MIXED CONFIGURATION

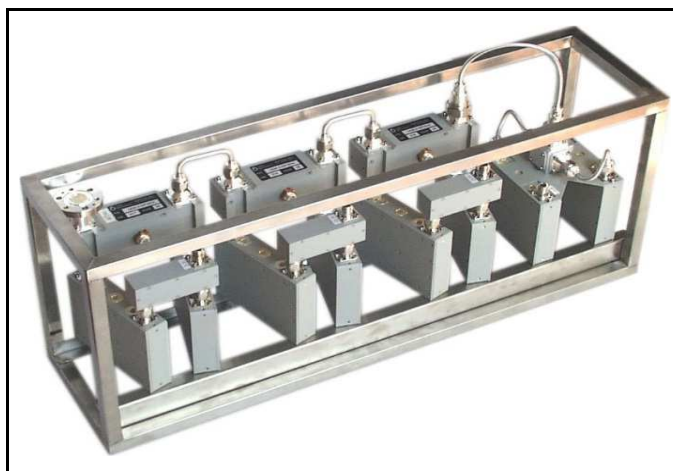

Tunable within whole UHF range.
For 6,7,8 MHz channel bandwidth.
Different connectors on request.

Input Connectors:	N
Output Connectors:	DIN 7/16
Temperature range (C°):	-10 ÷ 50
Weight (kg):	20

DVB-T @ 8 MHz	
Frequency range (MHz)	470 ÷ 862
Bandwidth (MHz)	6 ÷ 8
Insertion loss (dB)	< 0.85
Return loss (dB)	> 24
Input/output impedance (Ohm)	50
Min. distance between channels	1 guard channel
Isolation between channels (dB)	> 30
Maximum input power (W)	100 ATV - 70 DTV
Maximum output power (W)	500 ATV - 350 DTV

