



PART NUMBER:

TITLE:

1494-6-2N-S2

2x500W UHF / DTV STAR POINT COMBINER

UNCritical MASK

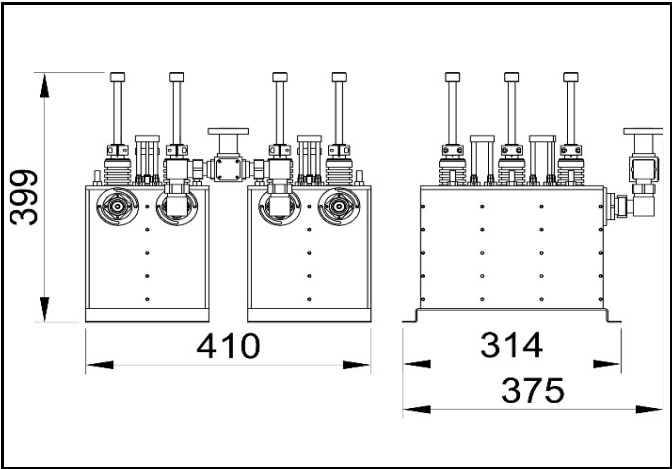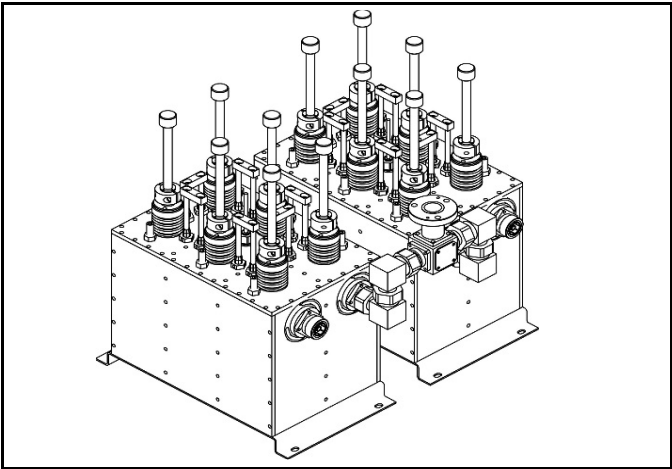

Tunable within whole UHF range.
For 6,7,8 MHz channel bandwidth.
Different connectors on request.

Input Connectors:	DIN 7/16
Output Connectors:	EIA 7/8"
Maximum operating temp. (°C)	70
Weight (kg):	30

DVB-T @ 8 MHz	
Frequency range (MHz)	470 ÷ 862
Insertion loss (dB) @ C.F.	< 0.5
Return loss by channels (dB)	> 22
Input/Output Impedance (Ohm)	50
Min. dist. between channels (dB)	1 guard channel
Insulation between channels (dB)	30
Maximum channel input power (W)	500 DTV
Maximum output power (W)	1000 DTV
Maximum group delay variation (ns)	300

