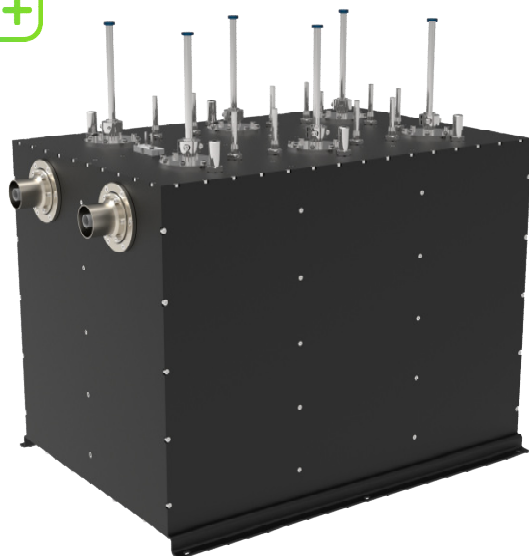



PRODUCT FEATURES
DAB 6-pole 200mm Bandpass filter

- Dual Cross-Coupling
- Full-band tunable
- DC-Short
- Temperature compensated

OPTIONS


- Heat Sinks
- Forced Air Cooling
- Liquid Cooling
- 19" rack frame supports
- Custom rack frame

SPECIFICATIONS

<i>PRODUCT CODE:</i>	BPF36200
<i>No. of POLES</i>	6-pole helliptical
<i>CAVITY SIZE</i>	200 mm
<i>TEMPERATURE STABILITY</i>	< 1 kHz/°K
<i>MAX OPERATING TEMPERATURE (body)</i>	65 °C (149 °F)
<i>TEMPERATURE OPERATING ENVIRONMENT</i>	-5 ÷ 50 °C 23 ÷ 122 °F
<i>CONNECTIONS ⁽²⁾ and PRODUCT CODES</i>	1 5/8" flange ⁽¹⁾ BPF36200-88 1 5/8" unflanged BPF36200-AA 7/8" flange BPF36200-44 7/8" unflanged BPF36200-66

ELECTRICAL DATA

<i>FREQUENCY RANGE:</i>	174 ÷ 240 MHz
<i>MAXIMUM RMS INPUT POWER⁽³⁾</i>	3000 W ⁽⁴⁾
<i>INSERTION LOSS @ F0</i>	< 0.5 dB ⁽⁵⁾
<i>INSERTION LOSS @ F0 ± 0.77 MHz</i>	< 1.3 dB ⁽⁵⁾
<i>ATTENUATION @ F0 ± 0.97 MHz</i>	> 16 dB ⁽⁵⁾
<i>ATTENUATION @ F0 ± 1.77 MHz</i>	> 45 dB ⁽⁵⁾
<i>ATTENUATION @ F0 ± 2.20 MHz</i>	> 53 dB ⁽⁵⁾
<i>ATTENUATION @ F0 ± 3.00 MHz</i>	> 53 dB ⁽⁵⁾
<i>BANDWIDTH</i>	1.54 MHz
<i>RETURN LOSS (VSWR)</i>	< -26 dB < 1.10
<i>INPUT/OUTPUT IMPEDANCE</i>	50 Ω
<i>GROUP DELAY VARIATION</i>	< 950 ns

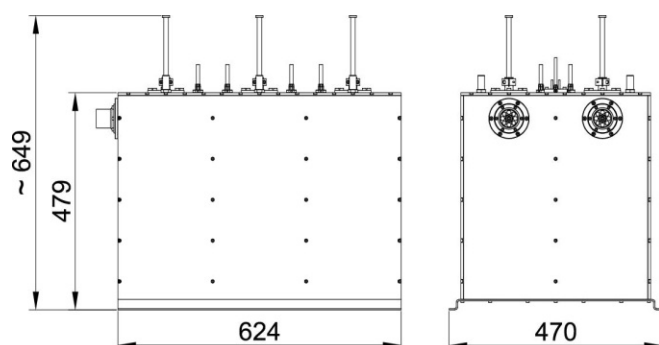DIMENSIONAL DETAIL


<i>DIMENSIONS</i>	624x470x645 mm 24.6x18.5x25.4 "
<i>WEIGHT</i>	51 Kg (112 lbs)

⁽¹⁾ Default configuration ⁽²⁾ Other connections available ⁽³⁾ Altitude < 1525 mt (5000 ft) ⁽⁴⁾ Higher power rate with Heat Sinks or Forced Air Cooling or Liquid Cooling options
⁽⁵⁾ Other tuning configuration available