


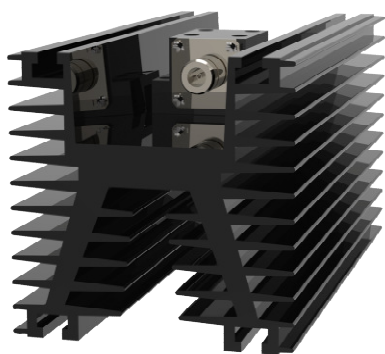

PRODUCT FEATURES

200W Dummy Load – DC÷2GHz

- Low VSWR
- Convection cooled
- Indoor
- Optional monitoring probe


SPECIFICATIONS

PRODUCT CODE:	DLD201
TEMPERATURE OPERATING ENVIRONMENT	-35 ÷ 50 °C -31 ÷ 122 °F
Cooling fins vertically	
CONNECTIONS & CODES ⁽¹⁾	x=0: N female
DLD201-x where:	x=2: DIN 7/16 female
x – connection	


ELECTRICAL DATA

FREQUENCY RANGE	DC-2GHz
MAXIMUM RMS INPUT POWER ⁽²⁾	200W
RETURN LOSS (VSWR)	> -27.3 dB (@ 0-1.2GHz) < 1.09 (@ 0-1.2GHz) > -22.6 dB (@ 1.2GHz-2GHz) < 1.16 (@ 1.2GHz-2GHz)
IMPEDANCE	50 Ω

Power Derating Curve

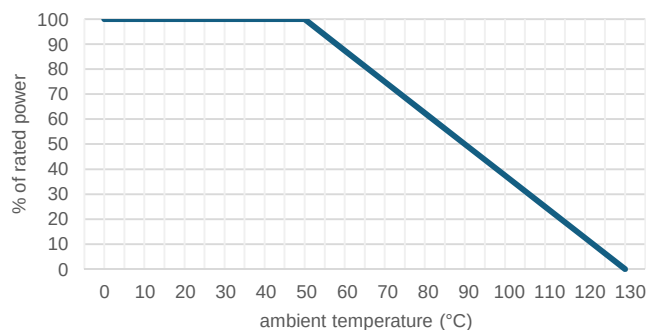

DIMENSIONAL DETAIL



DIMENSIONS	120x245x120 mm 4.72x9.65x4.72"
WEIGHT	2,5 Kg (5.5 lbs)

⁽¹⁾ Other connections available ⁽²⁾ Altitude < 1525 mt (5000 ft)