


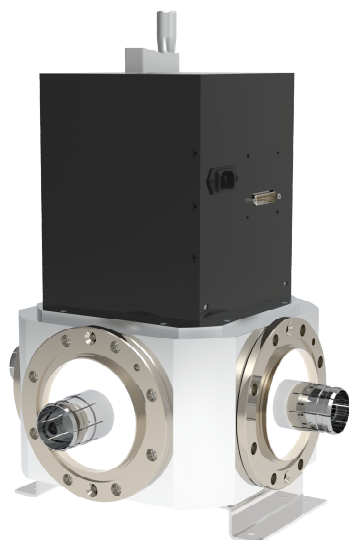

PRODUCT FEATURES

2-way motorized coaxial switch

- Motor drive
- Position indicator
- End position indicator
- End position signal contacts
- Advanced signal contacts

OPTIONS

- 19" rack frame supports
- Extra-Safety configuration
- Custom Pin-Out


SPECIFICATIONS

PRODUCT CODE	MCS412
TYPE	motorized switch
No. of PORTS	4
SWITCHING TIME	<3 sec.
TEMPERATURE OPERATING ENVIRONMENT	-10 ÷ 50 °C 14 ÷ 122 °F
CONNECTIONS ⁽¹⁾ & CODES MCS412-wxyz where:	w=P: 4 1/2" male ⁽⁵⁾ x=1: 220÷240Vac 50÷60Hz x=2: 110÷120Vac 50÷60Hz y=1: 5Vdc y=2: 12Vdc y=3: 24Vdc z=1: Default z=2: Custom ⁽²⁾
w ⁽¹⁾ – connections	
x – operating voltage	
y – control voltage	
z – pin-out	

ELECTRICAL DATA

FREQUENCY RANGE	DC ÷ 862 MHz
MAXIMUM INPUT POWER ^(3, 4)	108MHz: 85000W 230MHz: 60000W 860MHz: 30000W
INSERTION LOSS	< 0.05 dB
ISOLATION	108MHz: >75dB 230MHz: >65dB 860MHz: >52dB
RETURN LOSS (VSWR)	108MHz: >40 (<1:1.02) 230MHz: >38 (<1:1.03) 860MHz: >30 (<1:1.06)
IMPEDANCE	50 Ω

DIMENSIONAL DETAIL

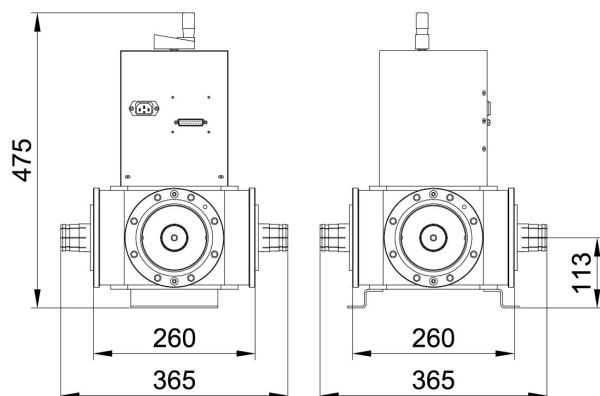

DIMENSIONS	365x365x475 mm 14.37x14.37x18.70 "
WEIGHT	29 Kg (63.93 lbs)

⁽¹⁾ Other connections available ⁽²⁾ Custom pinout available ⁽³⁾ Altitude < 1525 mt (5000 ft) ⁽⁴⁾ According to the connector's type ⁽⁵⁾ Default