
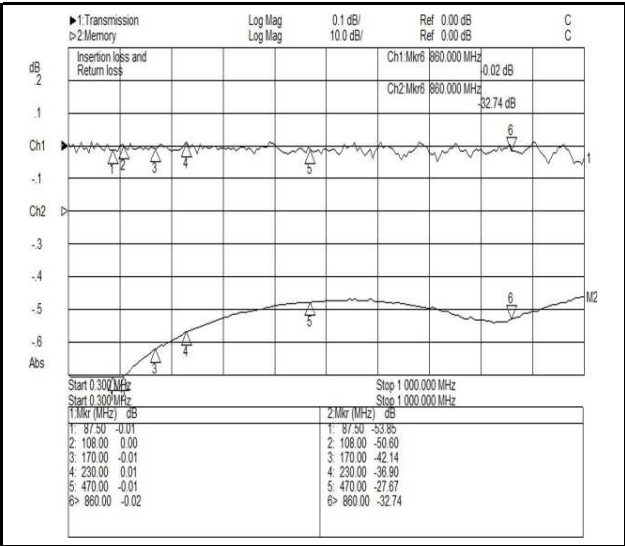
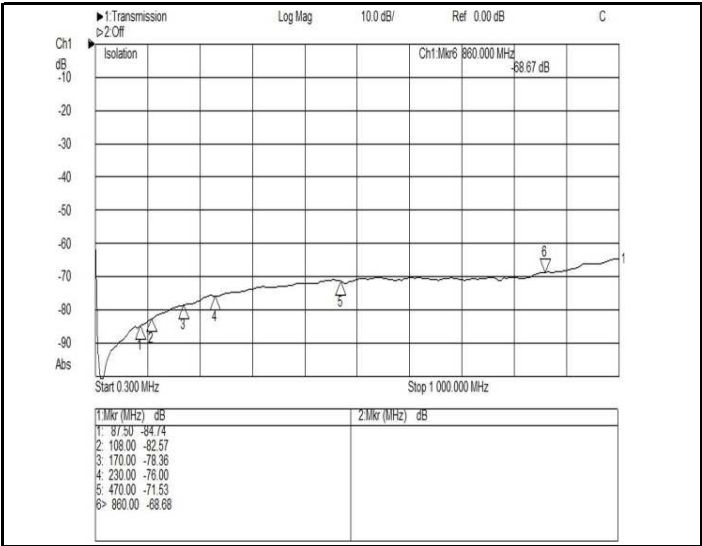


PART NUMBER: 1364

TITLE: EIA 1 5/8" MOTORIZED COAXIAL SWITCH

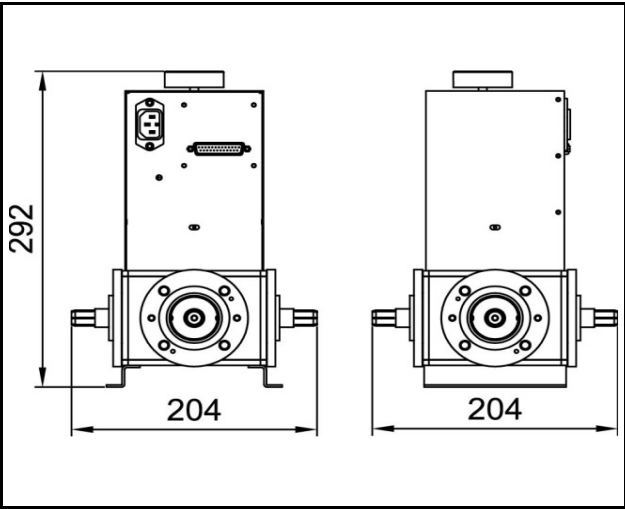

ELECTRICAL CHARACTERISTICS	
Frequency range (MHz)	DC ÷ 862
Insertion Loss (dB)	< 0.05
Operating Voltage (Vac)	230 or 110 / 50 or 60 Hz
Control Voltage (Vdc)	5V, 12V, 24V
Switch-over time (s)	< 2
Input/Output Impedance (Ohm)	50

MECHANICAL CHARACTERISTICS	
Connectors	EIA 1 5/8"
Temperature range (C°)	-10 ÷ 50
Weight (Kg)	6.5

FREQUENCY BAND	FM RADIO	BIII	BIV-V
Return loss (dB)	> 40	> 35	> 26
Insulation (dB)	> 80	> 65	> 60
Max Power (W)	10000	8000	5000

PART NUMBER: 1364

TITLE: EIA 1 5/8" MOTORIZED COAXIAL SWITCH (FUNCTIONAL DIAGRAM)

