
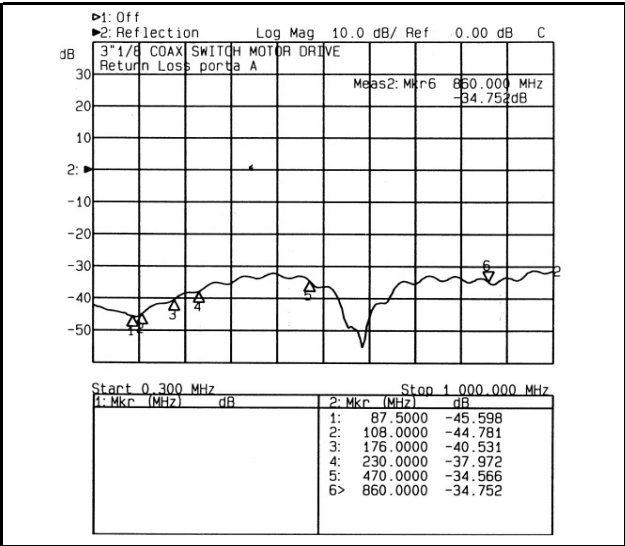
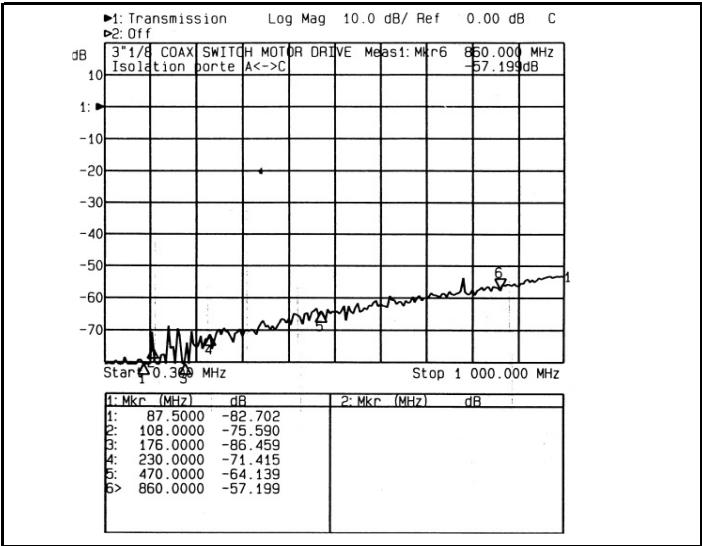


PART NUMBER: 1405

TITLE: EIA 3 1/8" MOTORIZED COAXIAL SWITCH

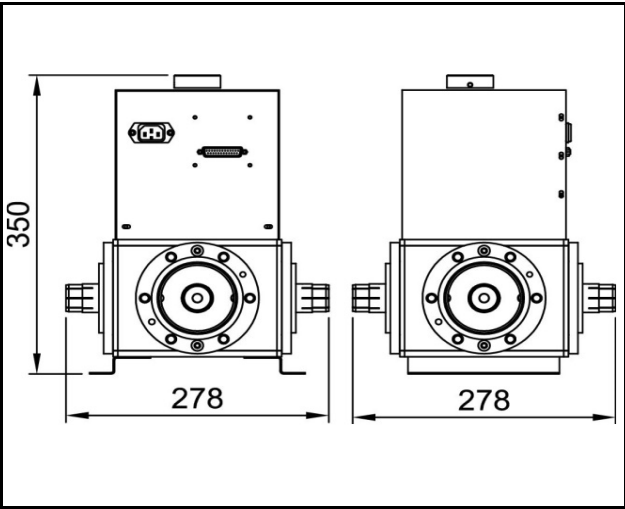

ELECTRICAL CHARACTERISTICS

Frequency range (MHz)	DC ÷ 862
Insertion Loss (dB)	< 0.05
Operating Voltage (Vac)	230 or 110 / 50 or 60 Hz
Control Voltage (Vdc)	5V, 12V, 24V
Switch-over time (s)	< 2
Input/Output Impedance (Ohm)	50

MECHANICAL CHARACTERISTICS

Connectors	EIA 3 1/8"
Environmental temp (C°)	-10 ÷ 50
Weight (Kg)	14

FREQUENCY BAND	FM RADIO	BIII	BIV-V
Return loss (dB)	> 40	> 35	> 30
Insulation (dB)	> 75	> 70	> 55
Max Power (W)	40000	30000	18000

PART NUMBER: 1405

TITLE: EIA 3 1/8" MOTORIZED COAXIAL SWITCH (FUNCTIONAL DIAGRAM)

