
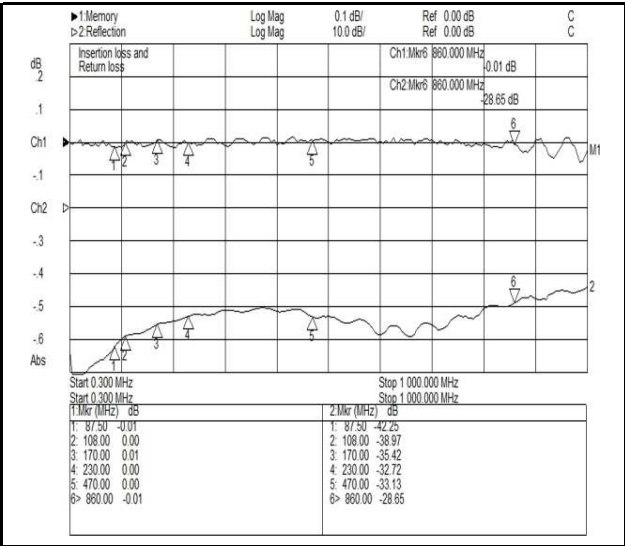
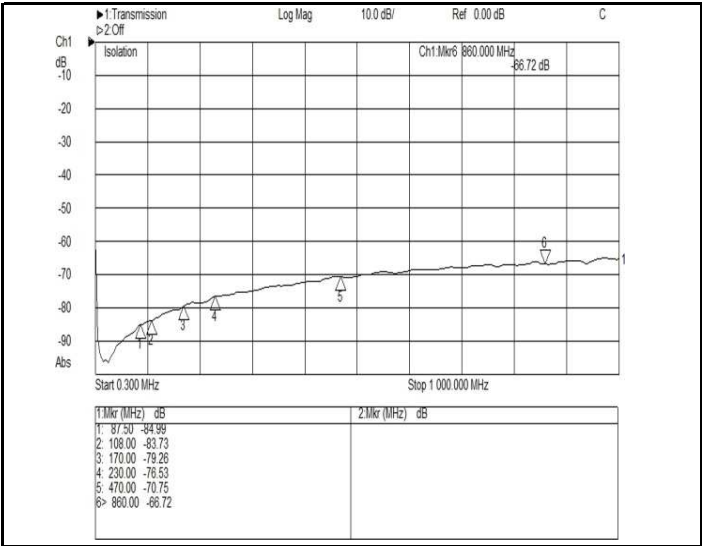


PART NUMBER: 1484

TITLE: EIA 7/8" MOTORIZED COAXIAL SWITCH

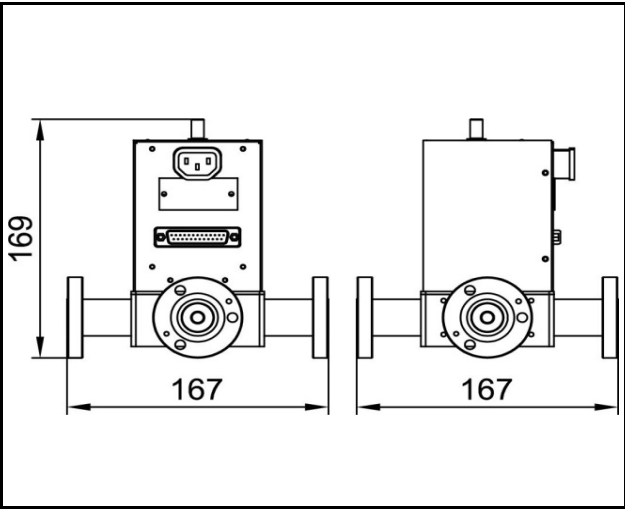

ELECTRICAL CHARACTERISTICS

Frequency range (MHz)	DC ÷ 862
Insertion Loss (dB)	< 0.05
Operating Voltage (Vac)	85÷264 / 47÷63Hz
Control Voltage (Vdc)	5V, 12V, 24V
Switch-over time (s)	< 1
Input/Output Impedance (Ohm)	50

MECHANICAL CHARACTERISTICS

Connectors	EIA 7/8"
Temperature range (C°)	-10 ÷ 50
Weight (Kg)	1.7

FREQUENCY BAND	FM RADIO	BIII	BIV-V
Return loss (dB)	> 35	> 30	> 26
Insulation (dB)	> 70	> 65	> 55
Max Power (W)	5000	3500	2000

PART NUMBER:

1484

TITLE:

EIA 7/8" MOTORIZED COAXIAL SWITCH (FUNCTIONAL DIAGRAM)

