
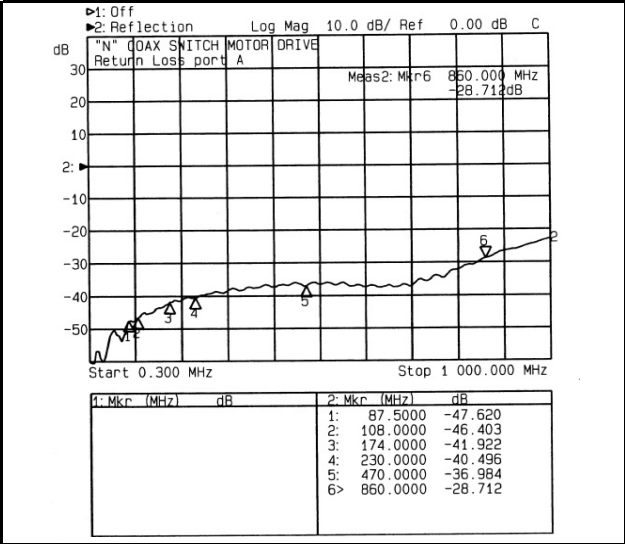
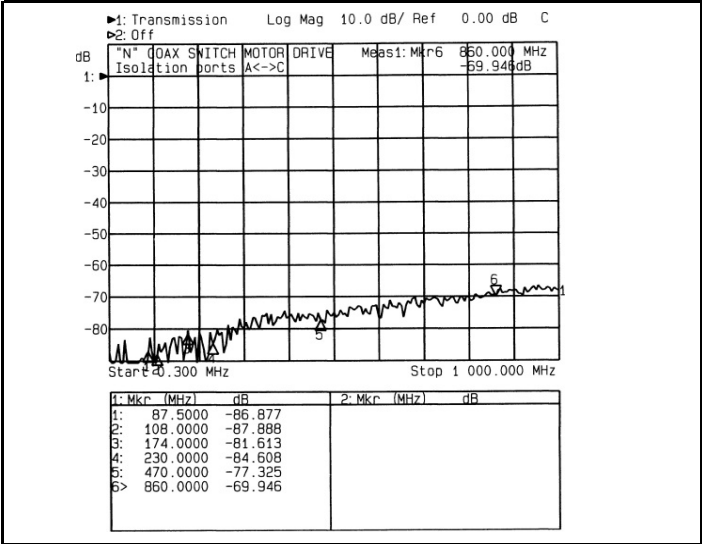


PART NUMBER: 1606-C2

TITLE: "N" MOTORIZED COAXIAL SWITCH (24VDC CONTROL)

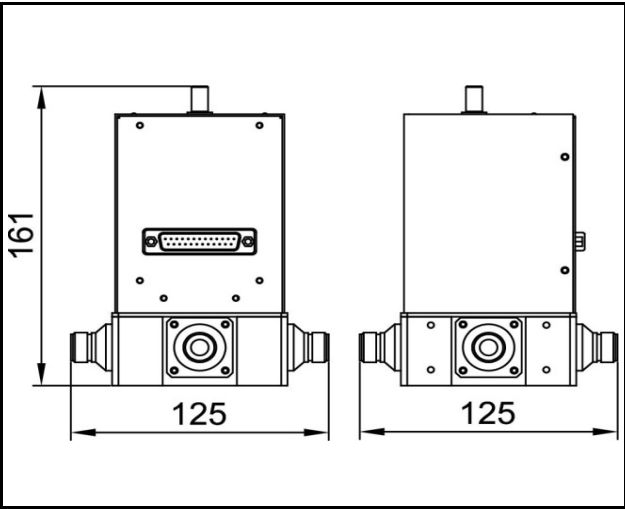

ELECTRICAL CHARACTERISTICS	
Frequency range (MHz)	DC ÷ 862
Insertion Loss (dB)	< 0.05
Operating Voltage (Vdc)	24V
Control Voltage (Vdc)	24V
Switch-over time (s)	< 1
Input/Output Impedance (Ohm)	50

MECHANICAL CHARACTERISTICS	
Connectors	N
Temperature range (C°)	-10 ÷ 50
Weight (Kg)	1.7

FREQUENCY BAND	FM RADIO	BIII	BIV-V
Return loss (dB)	> 35	> 30	> 26
Insulation (dB)	> 70	> 65	> 55
Max Power (W)	750	500	250

PART NUMBER: 1606-C2

TITLE: "N" MOTORIZED COAXIAL SWITCH (FUNCTIONAL DIAGRAM)

